



# PRODUCT RANGE

## BROCHURE 2024



FASTER



COOLER



UNIVERSAL



UNIQUE



GREENER



SAFER



# ABOUT



Kerry Johns Ltd is a family owned business, with 60 years of experience in the carpet and flooring industry. For the past 25 years, we have specialised in the supply of IMO certified products for the Marine Industry.



Launched in the UK in November 2018, Firexo offers a groundbreaking fire safety solution suitable for all fire classes.

Their extinguishers, awarded the BSI Kitemark in 2023, have gained popularity in the industry due to their simplicity, effectiveness, and eco-friendliness.

Firexo's partnership with Kerry Johns Ltd aims to provide unmatched fire protection throughout the marine industry.

**MarineSpec**  
**IMO certified products**

# THE RANGE



## EXTINGUISHERS

BSI Kite Mark Approved  
Standard CE / EN3 Accredited  
Stainless Steel



## AEROSOLS

500ml Aerosol Extinguisher  
MarineSpec Firexo 'MINI' Aerosol



## WIRELESS ALARMS

Interlinked Alarms  
Standalone Alarms



## ANCILLIARIES


Red or Chrome Extinguisher Stands  
Transport Brackets  
Extinguisher Signage



## MARINESPEC FIREXO SACHET

MarineSpec Firexo Pan Fire Sachet

# EXTINGUISHERS

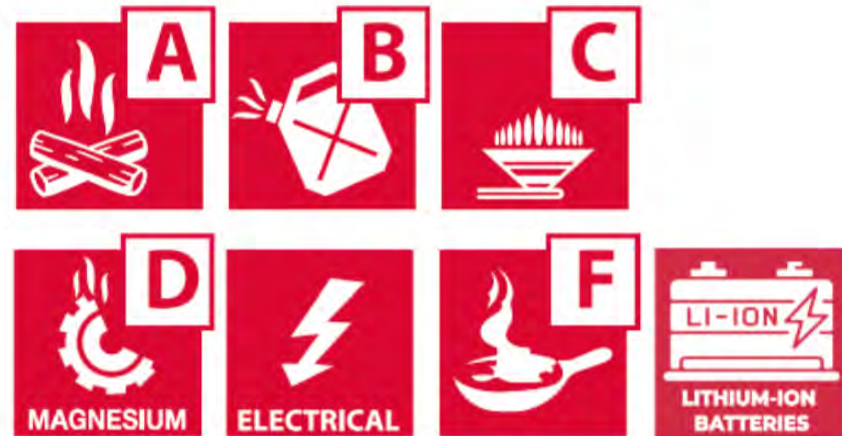


# Stainless Steel Extinguisher

MarineSpec Firexo's Stainless Steel Extinguishers combine modern design with their patented 'All Fires' Extinguishing Medium, offering impressive Fire Ratings, Temperature Ranges, Discharge Times, and a 5-year warranty.

- Polished Stainless-Steel Design
- Easy-release hose mount
- ADR approved transport packaging
- Wall mount bracket included
- Lightweight
- 5-Year Manufacturer's Warranty
- CE/UKCA Approved

PRODUCT	FIREXO 2L STAINLESS STEEL ALL FIRES	FIREXO 6L STAINLESS STEEL ALL FIRES	FIREXO 9L STAINLESS STEEL ALL FIRES
MODEL/PRODUCT NO.	809-765-347-066	809-765-347-096	809-765-347-126
CAPACITY	2 LITRES	6 LITRES	9 LITRES
OVERALL PRODUCT HEIGHT	430 mm	530 mm	635 mm
CYLINDER HEIGHT	335 mm	450 mm	545 mm
CYLINDER DIAMETER	110 mm	162 mm	180 mm
CYLINDER MATERIAL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
PRESSURISING GAS	NITROGEN	NITROGEN	NITROGEN
TEST PRESSURE	30 BAR	30 BAR	30 BAR
WORKING PRESSURE	12 BAR	12 BAR	12 BAR
WEIGHT (FULL)	3.52 KG	9.50 KG	14.28 KG
WEIGHT (EMPTY)	1.18 KG	2.48 KG	3.75 KG
SPRAY RANGE	1-3 m	1-4 m	1-4 m
DISCHARGE TIME	15-20 SECONDS	25-30 seconds	35-45 seconds
TEMPERATURE RANGE	-15 °C / +60 °C	-15 °C / +60 °C	-15 °C / +60 °C
WARRANTY	5 YEARS	5 YEARS	5 YEARS

# EXTINGUISHERS

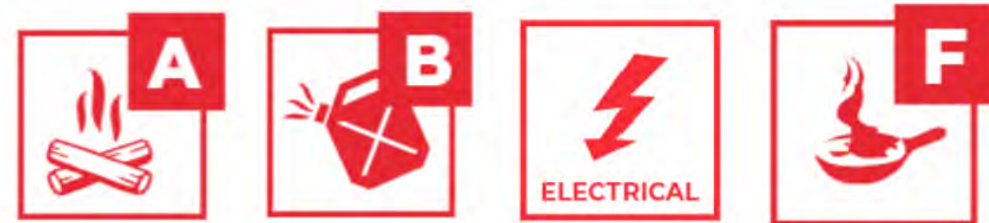

# Kite Marked Extinguisher

**Meeting British Std. EN3-7 and European compliance.**


MarineSpec Firexo's patented all fires extinguishing medium offers excellent fire ratings, temperature ranges, discharge times, and a 5-year warranty.

- Wall mounting bracket included
- Tested on Li-Ion Batteries in Sweden
- Suitable for Class C & D Fires
- Available in 2L, 6L, and 9L sizes
- Fully serviceable to BS 5306-3
- Operates at -15 to +60 Celsius

PRODUCT	FIREXO 2L ALL FIRES	FIREXO 6L ALL FIRES	FIREXO 9L ALL FIRES
MODEL/PRODUCT NO.	809-765-347-846	809-765-347-876	809-765-347-906
CAPACITY	2 LITRES	6 LITRES	9 LITRES
OVERALL PRODUCT HEIGHT	415 mm	520 mm	595 mm
CYLINDER HEIGHT	313 mm	430 mm	490 mm
CYLINDER DIAMETER	110 mm	162 mm	184 mm
CYLINDER MATERIAL	STEEL	STEEL	STEEL
PRESSURISING GAS	NITROGEN	NITROGEN	NITROGEN
TEST PRESSURE	30 BAR	30 BAR	30 BAR
WORKING PRESSURE	12 BAR	12 BAR	12 BAR
WEIGHT (FULL)	4.09 KG	10.67 KG	15.13 KG
WEIGHT (EMPTY)	1.75 KG	3.65 KG	4.6 KG
SPRAY RANGE	1-3 m	1-4 m	1-4 m
DISCHARGE TIME	20-25 seconds	25-35 seconds	45-55 seconds
TEMPERATURE RANGE	-15 °C / +60 °C	-15 °C / +60 °C	-15 °C / +60 °C
WARRANTY	5 YEARS	5 YEARS	5 YEARS
FIRE RATINGS	13A/34B/C/D/ELECTRICAL/25F/LITHIUM-ION	34A/113B/C/D/ELECTRICAL/75F/LITHIUM-ION	55A/183B/C/D/ELECTRICAL/75F/LITHIUM-ION



# EXTINGUISHERS

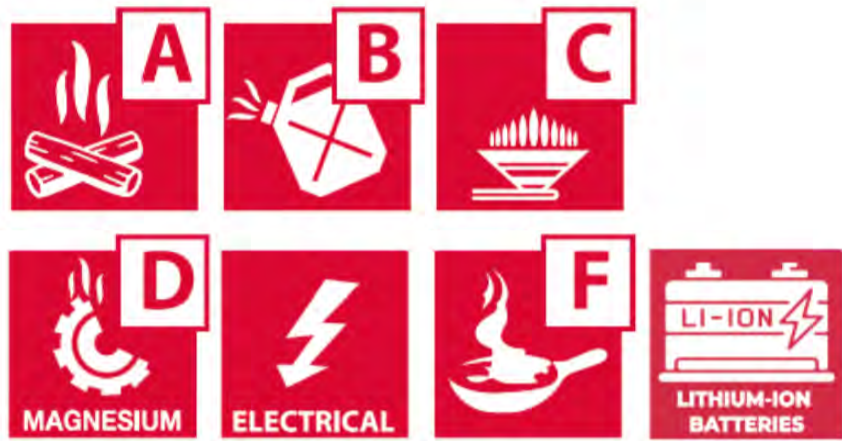

**MarineSpec**  
IMO certified products

# Standard Extinguisher




**Same power as Kitemark units but more flexibility in labeling for fire class suitability.**

MarineSpec Firexo's patented all fires extinguishing medium offers impressive Fire Ratings, Temperature Ranges, Discharge Times, and a 5-year warranty.

- Fire tested and approved at CNPP in France.
- Fully serviceable to BS 5306-3.
- ADR approved transport packaging included.
- Wall mount bracket provided.
- Easy 'PASS' function method.
- 5-Year Manufacturer's Warranty.
- CE/UKCA Approved.

PRODUCT	FIREXO 2L STAINLESS STEEL ALL FIRES	FIREXO 6L STAINLESS STEEL ALL FIRES	FIREXO 9L STAINLESS STEEL ALL FIRES
MODEL/PRODUCT NO.	809-765-347-066	809-765-347-096	809-765-347-126
CAPACITY	2 LITRES	6 LITRES	9 LITRES
OVERALL PRODUCT HEIGHT	430 mm	530 mm	635 mm
CYLINDER HEIGHT	335 mm	450 mm	545 mm
CYLINDER DIAMETER	110 mm	162 mm	180 mm
CYLINDER MATERIAL	STAINLESS STEEL	STAINLESS STEEL	STAINLESS STEEL
PRESSURISING GAS	NITROGEN	NITROGEN	NITROGEN
TEST PRESSURE	30 BAR	30 BAR	30 BAR
WORKING PRESSURE	12 BAR	12 BAR	12 BAR
WEIGHT (FULL)	3.52 KG	9.50 KG	14.28 KG
WEIGHT (EMPTY)	1.18 KG	2.48 KG	3.75 KG
SPRAY RANGE	1-3 m	1-4 m	1-4 m
DISCHARGE TIME	15-20 SECONDS	25-30 seconds	35-45 seconds
TEMPERATURE RANGE	-15 °C / +60 °C	-15 °C / +60 °C	-15 °C / +60 °C
WARRANTY	5 YEARS	5 YEARS	5 YEARS
FIRE RATINGS	13A/34B/C/D/ELECTRICAL/25F/LITHIUM-ION	34A/113B/C/D/ELECTRICAL/75F/LITHIUM-ION	55A/183B/C/D/ELECTRICAL/75F/LITHIUM-ION

# AEROSOLS

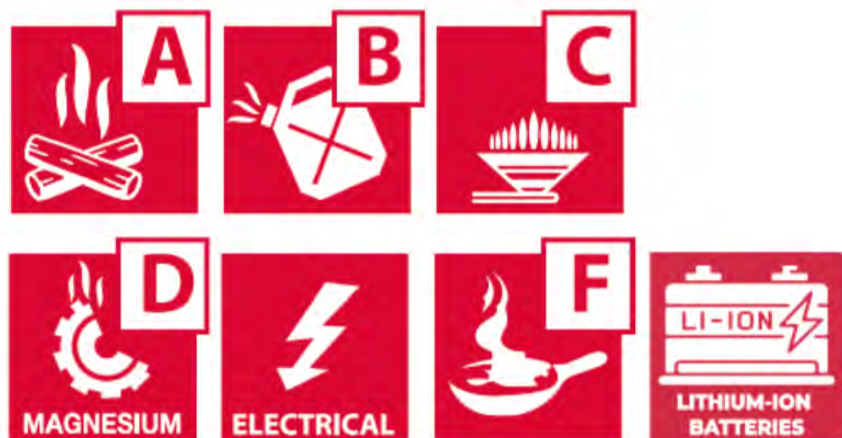

## MarineSpec Firexo 500ml Aerosol

**Key features:** suitable for all fire types, single use, no maintenance, and a 3-year warranty.

The 500ml Aerosol is compact, lightweight, and EN3 fire-rated. It includes a transport-approved bracket and a pressure gauge for readiness.



## MarineSpec Firexo 150ml Mini Aerosol

**Key features:** single use, no maintenance, contains 150ml of Firexo All Fires Extinguishing Medium.

Ideal for quick and lightweight firefighting. Suitable for toolboxes, fleet vehicles, university accommodations, schools, or kitchens where fast protection is needed for escape.

Product	Firexo 150ml Mini Aerosol	Firexo 500ml Aerosol
Model Number / EAN	5060638821205	809-765-347-816
Capacity (L)	0.15	0.5
Overall Product Height (mm)	170	290
Cylinder Height (mm)	142	265
Cylinder Diameter (mm)	53	63
Weight Full (g) <i>Unit / Boxed</i>	220	1.1 / 1.35
Pressurizing Gas	Nitrogen	Nitrogen
Cylinder Material	Aluminium	Stainless Steel
Spray Range (m)	1-3	1-3
Discharge Time at 20°C (s)	10 - 12	10 - 12
Test Pressure		27 Bar
Working Pressure at 20°C		12 Bar
Temperature Range		-15°C / +60°C
Warranty		3 Years
Fire Ratings		3A/13B/C/D/Electrical/5F



# Wireless Alarms

Interlinked Smoke

Interlinked Heat

Interlinked Carbon Monoxide

Standalone Smoke



**MarineSpec**  
IMO certified products

# FXO Alarm Products

Connect up to 100 FXO for comprehensive coverage with our interlinked systems.

Aligned with updated Scottish legislation since 2022. It includes an Interlinked Smoke, Heat, and CO alarm, and a standalone smoke unit for smaller, custom risk areas.

Featuring a 10-year tamper-proof battery and a modern, sleek design, these alarms are ideal for domestic and rental properties.

- 10-year product life
- LED and Audible alarm
- Lightweight and stylish design
- Meets BS/EN standards
- Setup instructions included
- 3-year warranty

Product	Interlinked Smoke	Interlinked Heat	Interlinked CO	Standalone Smoke
Model Number	fxoIS1	AJ-718	fxoCO1	fxoSS1
Working Voltage	1 x DC3V Concealed Battery	3V Battery	2 x DC3V Concealed Battery	1 x DC3V Concealed Battery
Activation Temperature		54°C - 70°C		
Standby Current	<10uA			<12uA
Alarm Current	<60mA			<35mA
Low Voltage Threshold	2.6V			2.7V
Product Life Expentancy	10 Years	10 Years	10 Years	10 Years
Alarm Mode	LED and Audible Alarm	LED and Audible Alarm	LED and Audible Alarm	LED and Audible Alarm
Frequency Range	433MHz	433MHz	433MHz	
Antenna Gain	2.5dB			
Radio Transmission Power	13dB			
Alarm Sound	>85dB	>85dB	>85dB/3m	>85dB
Fire Protection Grade	V-0			V-0
Size	110mm x 42mm	116mm x 46mm	130mm x 75mm x 35mm	110mm x 42mm
Alarm Gross Weight	140g	125g	185g	140g
Design, Manufacturing and Testing Standard	EN 14604:2005	BS 5446-2: 2003	EN 50291-1:2018	EN 14604:2005
CO Sensor Type			Superior CO Electrochemical Sensor	
Working Temperature Range			-10°C to 50°C	
Humidity Range			30-90% RH	
Display			LCD	



# Ancillary Products

Fibreglass Stands

Chrome Stands

Transport Brackets

Signage Products



**MarineSpec**  
IMO certified products

## Fiberglass Extinguisher Stands

Lightweight Single or Double Fiberglass stands for Red and Stainless-Steel extinguishers, providing a convenient and identifiable storage solution in single and double capacities.

## Chrome Extinguisher Stands

Lightweight Chrome stands for Red and Stainless-Steel extinguishers, in single and double capacities. These provide a convenient and easily identifiable storage solution, serving as an alternative to wall mounting brackets

## Transport Brackets

These brackets are ideal for automotive and transport use, featuring an easy and quick-release function for quick access to MarineSpec Firexo extinguishers in emergencies.

## Signage Products

A range of signage options to complement your MarineSpec Firexo products, meeting legal requirements. This includes luminescent extinguisher signage for commercial settings, as well as non-luminescent options and brushed steel signage for Stainless-Steel Extinguishers.

**Key features:** Glow in the Dark finish (Luminescent), bespoke MarineSpec Firexo design, lightweight and easy to transport.



# Pan Fire Sachet



## Fiberglass Extinguisher Stands

Extinguishing up to 3 liters of fat using 120ml of bespoke extinguishing medium.

MarineSpec Firexo Sachet is designed for class F fires and it's ideal for kitchens, HMOs, and places where cooking fat is used. The sachet is disposable after use, with easy cleanup.

Key features: PAS tested for up to 3L of cooking fat, single use, compatible with MarineSpec Firexo Aerosol Products for kitchen use, includes a hanging strip for easy application at stove tops, and comes with a 1-year Manufacturer's Warranty.







Name	Firexo Sachet
Model/Product number	809-765-347-786
Capacity (litres)	0.12
Sachet Length (mm)	330
Sachet Width (mm)	70
Weight of Sachet (kg)	0.2
Temperature Range (°C)	0°C / + 60°C
Warranty	1yr
Fire Rating	3F
Conforms to BS PAS 2013-1:2013	Yes

[Click here to see the product in action.](#)

MarineSpec

firexo

For more information on the MarineSpec Firexo range, products or how we can assist in making your space a safer place, please get in touch.

TYPE of EXTINGUISHER	TYPE of FIRE							
	 <b>A</b> COMBUSTIBLE MATERIALS e.g. Paper, Home furnishings	 <b>B</b> FLAMMABLE LIQUIDS e.g. Petrol, Paints, Diesel	 <b>C</b> FLAMMABLE GASES e.g. Methane, Butane	 <b>D</b> FLAMMABLE METALS e.g. Aluminium, Magnesium	 <b>E</b> ELECTRICAL EQUIPMENT e.g. Tv, Heaters, Kitchen Gadgets	 <b>F</b> COOKING OILS, FATS e.g. Chip Pans, Fry Pans	 <b>LITHIUM-ION BATTERIES</b> e.g. Phones, Tablets, Laptops	
<b>firexo</b>	✓	✓	✓	✓	✓	✓	✓	
<b>WATER</b>	✓	✗	✗	✗	✗	✗	✗	
<b>FOAM</b>	✓	✓	✗	✗	✗	✗	✗	
<b>DRY POWDER</b>	✓	✓	✓	✗	✓	✗	✗	
<b>CO<sub>2</sub> CARBON DIOXIDE</b>	✗	✓	✗	✗	✓	✗	✗	
<b>WET CHEMICAL</b>	✓	✗	✗	✗	✗	✓	✗	
<b>WATER MIST</b>	✓	✗	✗	✗	✓	✗	✗	

MarineSpec

IMO certified products

We look forward to hearing from you!

T: 44 (0) 1225 768 802

E: [marine@kerryjohns.co.uk](mailto:marine@kerryjohns.co.uk)

[www.kerryjohns.co.uk](http://www.kerryjohns.co.uk)

